


WITH GH, INNOVATION IS NOT AN EXTRA

After more than 60 years of experience and over 125.000 equipment manufactured, GH Cranes & Components' commitment to innovation is a fact. What is considered extra for others, is included as standard features for GH. When looking for exceptional safety, performance, durability and low maintenance, know that GH Cranes is the brand you can trust. We maintain a complete inventory of parts and components, and a team of professionals that are ready to assist you in all your material handling needs.

www.ghcranes.com

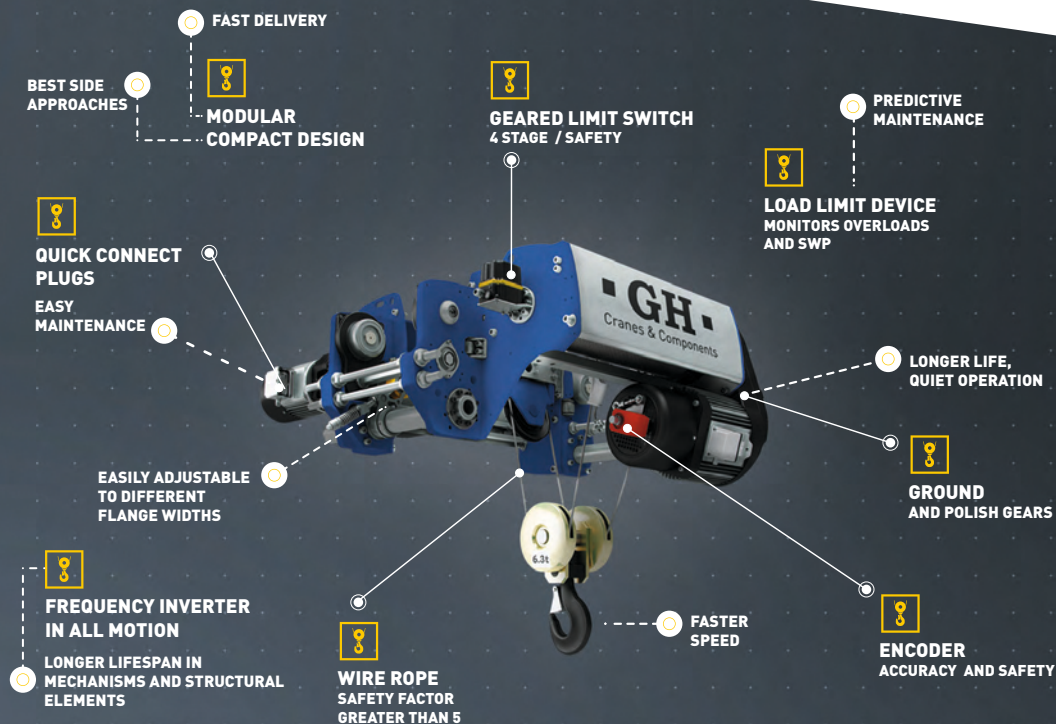

	GHA12	GHB11	GHD13
Capacity (metric tons)	3.2	5	10
Min. Duty	FEM 2m / HST-4 H4		
Hoisting speed (fpm)	26 fpm with loads less than 25% of nominal capacity 16 fpm with loads over 25% of nominal capacity		
Hoist motor power (Hp)	4.8	6.75	12.15
Wire rope safety factor	>5		
Gears	According to ISO 6336, quenched and tempered		
Cross travel speed (fpm)	6.5 – 65 with VFD		
Cross travel motor power (Hp)	0.5 Hp, 2 wheel drive		1.3 Hp, 2 wheel drive
Safety features	4 stage upper & lower limit switch Load limit device with: Safe Working Period Number of hoisting movements Time of hoisting movement Slack rope detection Encoder in hoisting motor		

Also available in double girder, fixed and suspended/curves versions